



IDP59 V1.0

LC5000-215CR Series INDUSTRIAL OPERATION PANEL


21.5" Full HD LCD

No touch screen with glass panel



Specification :


Basic	Display Signal	VGA+DVI input
	Communication port	USB2.0
	Weight	
	Stand	5575 series
	Keyboard Stand	Option item
	Dimension (W x H x D)	321mm*529mm*135.3mm
Power Input	Input voltage	DC 12-24V
	Max.power consumption	25W
LCD	LCD	21.5" Full HD TFT
	Resolution	1920 x 1080
	Colors	16.7MB
	Active Area (W x H)	476.64mm x 268.11mm
	Backlight	LED
	Backlight MTBF (hour)	30000hrs
	Pixel Pitch	0.248 x 0.248
	Luminance	250cd/m2
	Contrast Ratio	3000:1
	Viewing Angle	(L) 89 / (R) 89 / (T) 89 / (B) 89
Touch Screen	Type	No touch, glass panel
	Transmittance	> 81%
	Surface Hardness	Null
	Control interface	Null
Environmental	Work Temperature	-10 ~ 60°C (14~140°F)
	Storage Temperature	-20 ~ 80°C (-4 ~ 176°F)
	Relative Humidity	5~95% (non-condensing)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, 半正弦波, 持续 11ms
	EMC	CE/FCC Class A

Dimension : 321mm*529mm*135.3mm

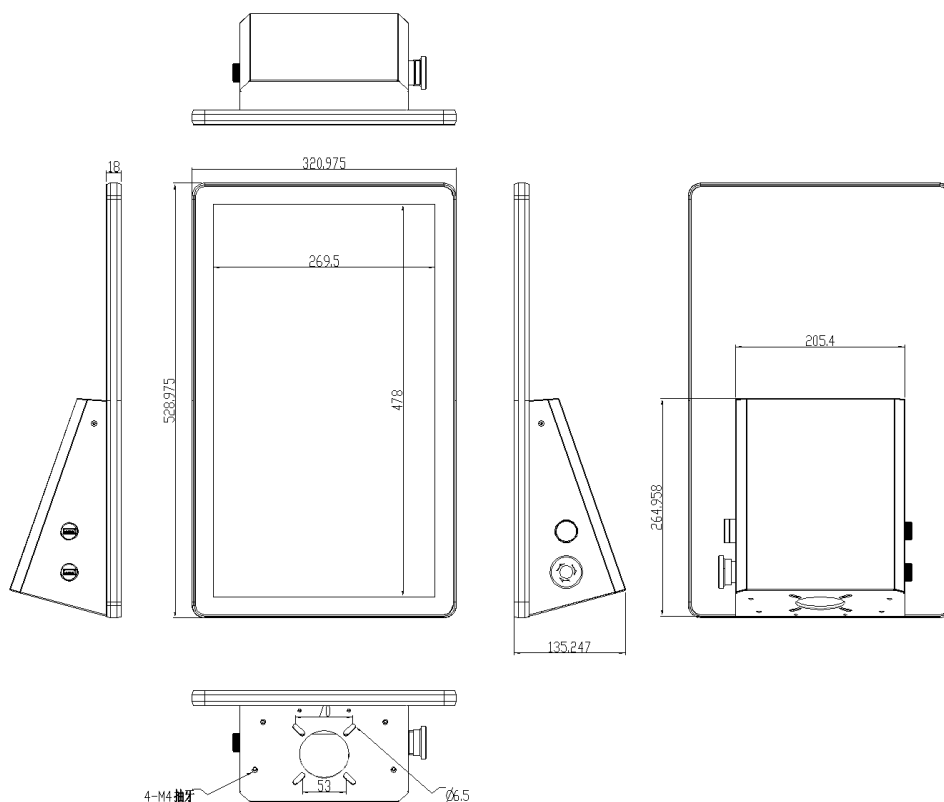

Back hole size for buttons

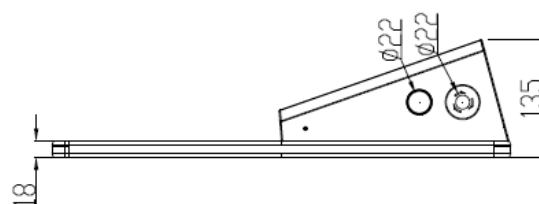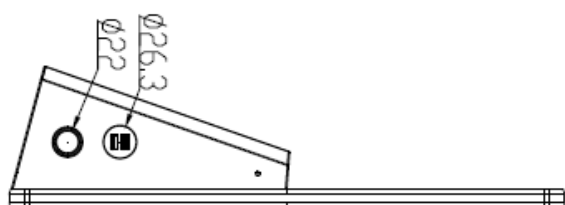

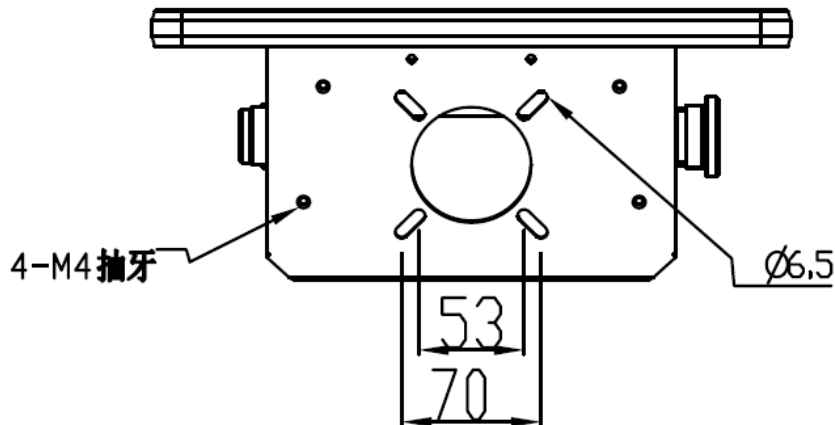Stand Hole size:

Suitable for the both connector with 53*53mm and 70*70mm

Ordering Information :

Model Name	Series Name	Specification
IDP59	LC5000-215CR	21.5"LCD/1920 x 1080/glass panel/

Option Item :

Adapter	KPL-060F, 12V60W
Power cable	With different plug
Keyboard Stand	3010101317 LC5000-215CR keyboard stand
-	
-	
-	