



IPC-615H

V2.0

Industrial Computer

4 U 高度、 19 英寸标准机架式工控机

Intel® Core™ 2nd / 3rd i7 / i5 / i3 /

Pentium / Celeron, LG A1155





Specifications:



Processor	CPU	Intel® Core™ 2nd / 3rd i7 / i5 / i3 / Pentium / Celeron, LGA1155
	BIOS	AMI UEFI 64 Mbit
Memory	Architecture	DDR3-1066 / 1333 / 1600MHz (Only Ivy bridge can fit for 1600MHz)
	Capacity	Up to 16 GB
	DIMM	2 x 204-pin SODIMM
Display	Graphic Controller	Intel®HD GT2 3000/4000 , 200MHz~1.2GHz
	VGA	Up to 1920 x 1200
	HDMI	Support 1920 x 1200
	VGA+HDMI	Yes, VGA + HDMI
Lan	LAN1、 2	Realtek Gbe LAN controller
Audio	Port	Optional
	Amplifier	N/A
I/O	COM	2x RS-232 (RS-232 or RS-485), 4x RS-232 (select)
	LPT	select
	USB	4 x USB3.0/2.0/1.1, 2 x USB2.0
Other	Digital IO	N/A
	WatchDog	255 seconds programmable
Expansion slot	MiniPCle	N/A
	PCle & PCI	1 x PCle x16 slot, 1 x PCle x4 slot, 1 x PCle x1 slot & 4 x 32bits PCI slot
	Add-in card	481mm x 430mm x 177mm (18.9" * 16.9" * 6.9")
	SSD、 HDD	1 * Mini SATA、 1*2.5 "HDD Bay
OS	Microsoft Windows	Windows 7, Windows 7 Embedded, Windows 10
	Linux	Ubuntu
Power	Type	AT
	Power Adapter	AC180~264V
	Power Dissipation	Depending on the CPU (Default built-in 300W power,)
Mechanism Parameters	Box structure	Hot dip galvanized sheet steel shel
	Mounting	Desktop mounting, Wall mounting
	Dimensions (L*W*H)	481mm x 430mm x 177mm (18.9" * 16.9" * 6.9")
	NW	9.62kg (21.21lb)
Environmental	Work Temperature	-20 ~ 60° C (-4°F ~140°F) (Using Wide Temperature Grade Solid State Hard Dis) 0 ~ 45° C (32 °F ~113 °F) (Use normal temperature grade mechanical hard disk)
	Storage Temperature	-40 ~ 80°C (-40°F~185°F)
	Relative humidity	5~95% (No condensation)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, Half sine wave, Continuous 11ms
	EMC	CE/FCC Class B
	Safety Certification	CCC

Dimensions:

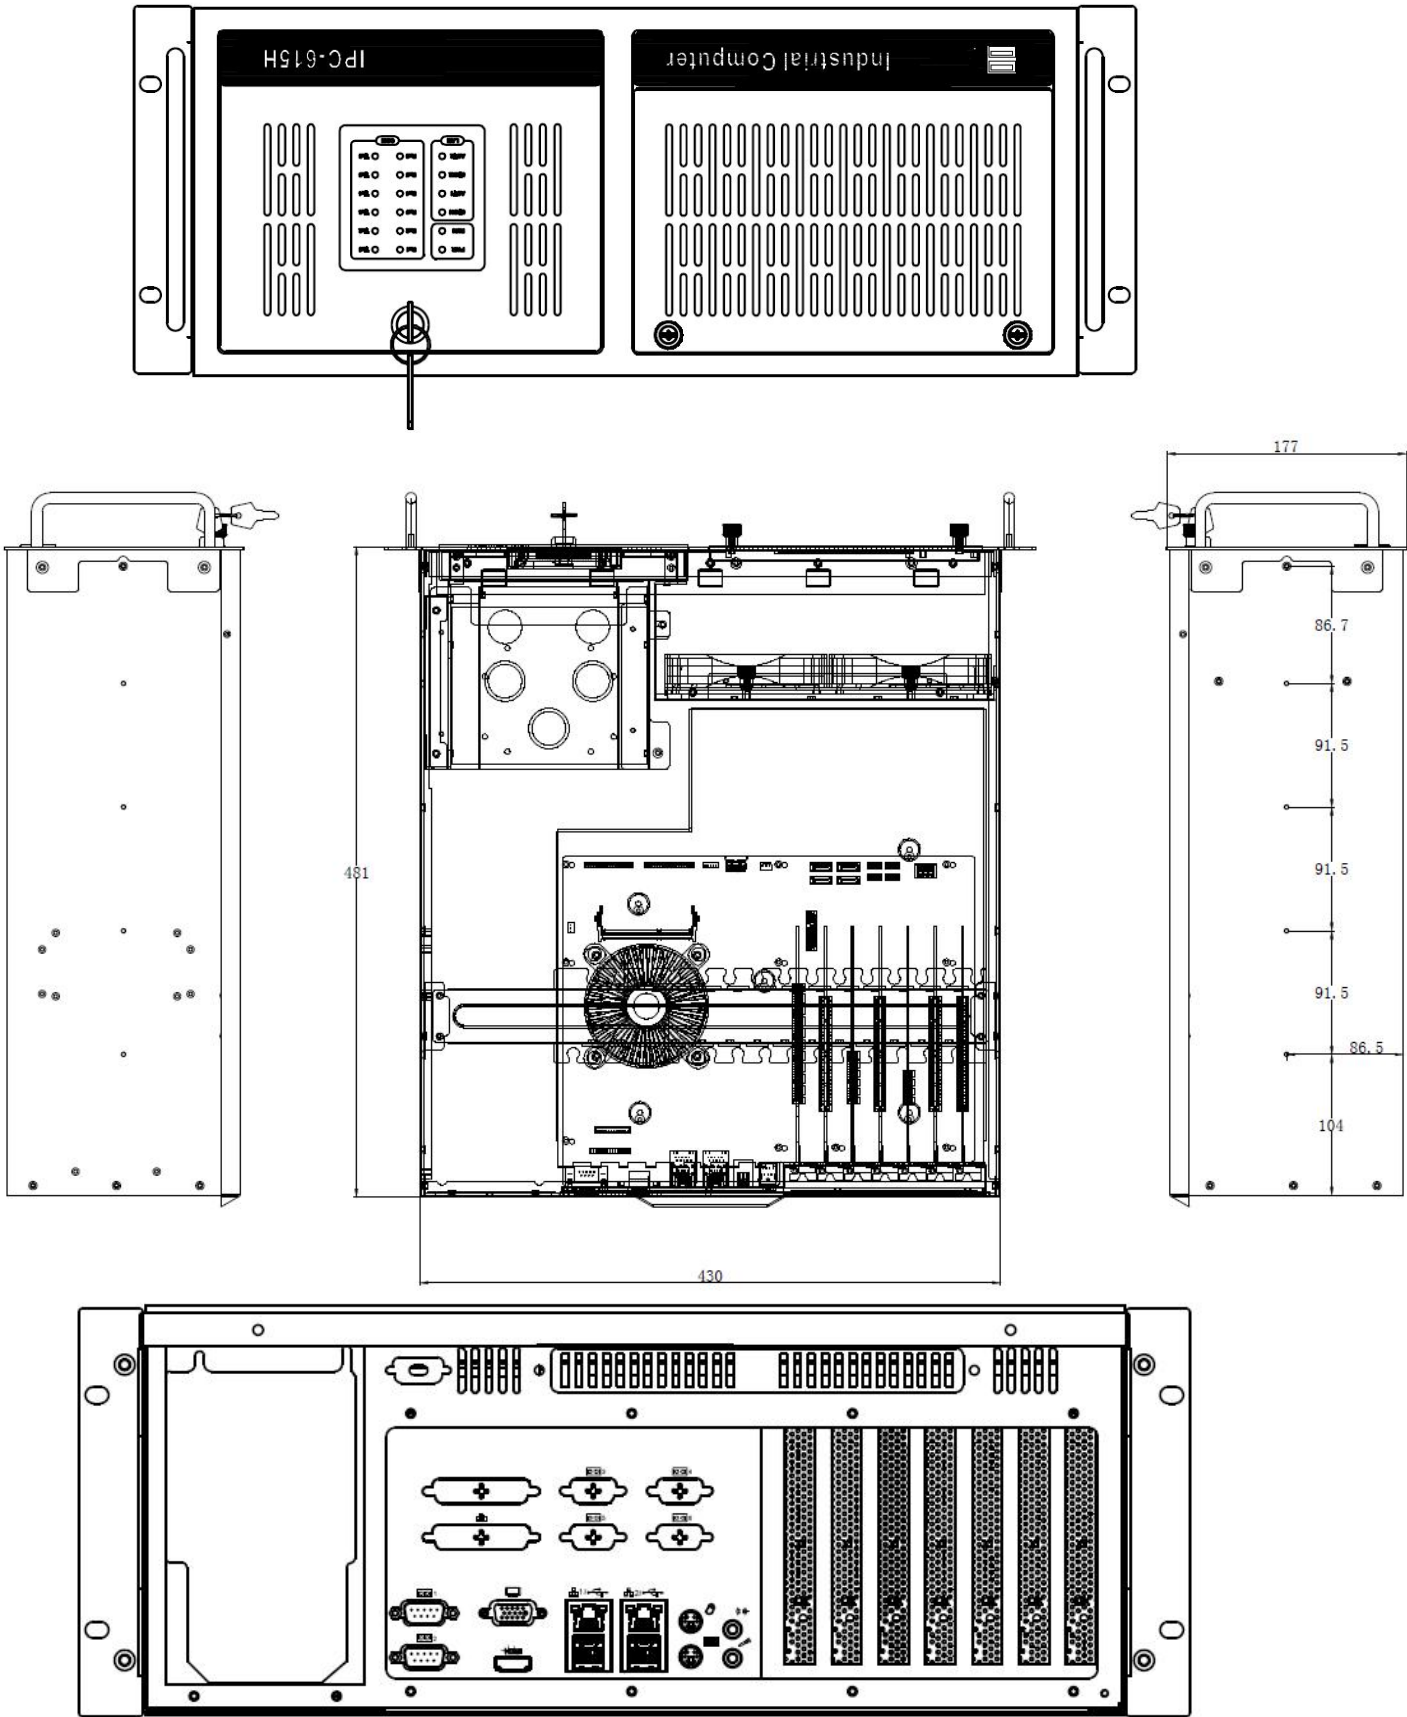

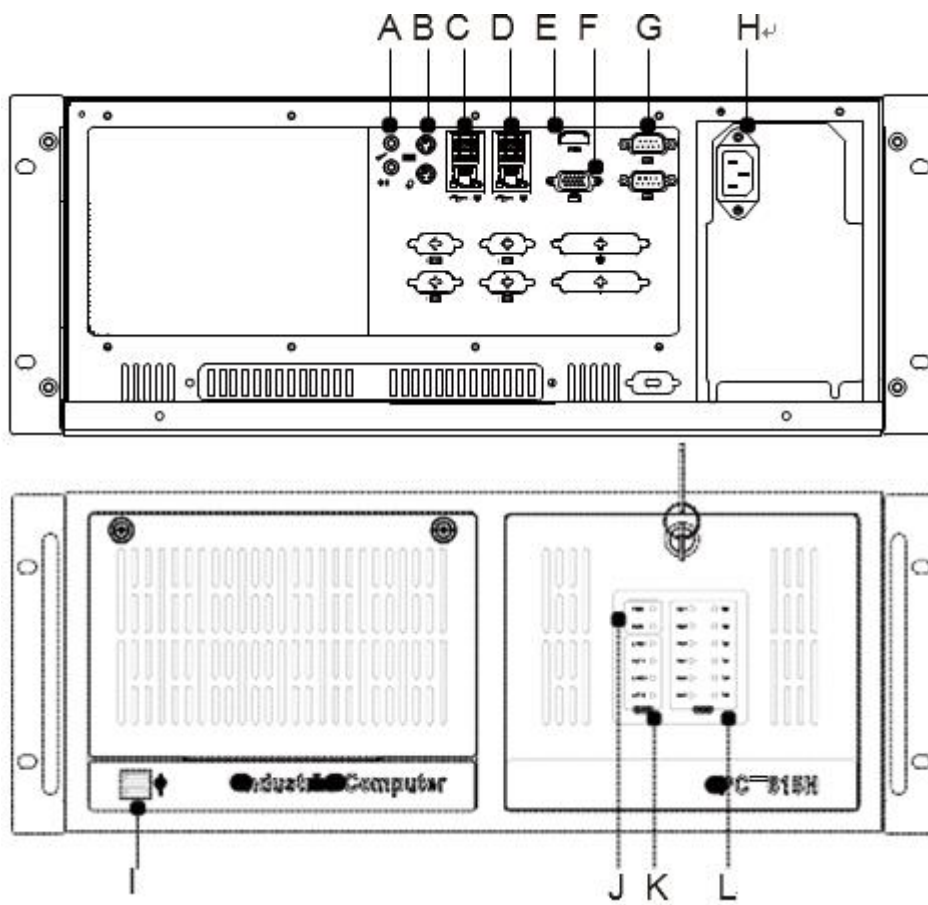

A: Lineout/MIC	B: PS/2	C: USB 3.0*2/LAN
D: USB 3.0*2/LAN	E: HDMI	F: VGA
G: COM1/2	H: AC IN	I: USB 2.0*2
J: Power LED/Run LED	K: LAN LED	L: COM LED

Ordering Information:

Product Type	Description
IPC-615H-D	NO CPU/NO SODIMM/2×LAN/6×USB2.0(Include 4xUSB2.0)/2×COM/VGA/HDMI/AUDIO/3xPCI-E +4xPCI/ Built-in 300W power /NO Power Supply Cord

Fittings of a Machine;:

Power Supply Cord	PSB-10+ST3 (L=1.8M,0.75×3)
Memory	DDR3 1600/1333/1066 MHz, 2 * SO- DIMM Slot, Up to 16 GB Memory Size
Hard disk	Support 2.5 寸, mSATA Rigid disk
CPU	Intel Pentium/ Celeron/ 2nd and 3rd Generation Core i3/5/7 CPU, LGA1155
-	Certificate of inspection/quality
-	Warranty card
-	Detailed list