



PANEL5000-C192-L-A

A0 Touch Screen Monitor



19" SXGA Capacitive Touch Screen
Industrial Monitor






Specifications :

General	Control button	Set Contrast ratio and Luminance via OSD at the back panel
	Dimensions (W x H x D)	460mm x 369mm x 47mm
	Drill Hole Size (W x H)	442mm x 351mm
	Box structure	Front panel: aluminum-magnesium alloy, anodized coating ;Back cover: SGCC, Ground isolation protection
	Mounting	Support panel mounted, wall-mounted, Desktop and VESA mounted
	Power Supply	DC 12 - 24V
	Power Dissipation	14W
	Signal (HDBaseT)	Integrated display and touch communication
	NW	6.6kg
LCD	LCD Size	19" SXGA TFT
	Resolution	1280 x 1024
	Colors	16.7MB
	Active Area (W x H)	376.32mm x 301.06mm (14.82"x 11.85")
	Backlight	LED
	MTBF	50000hrs
	Pixel Pitch(H x V)	0.294 x 0.294
	Luminance	250cd/m ²
	Contrast Ratio	1000 : 1
	Viewing Angle	(L) 85 / (R) 85 / (T) 80 / (B) 80
Touchscreen	Type	Multi-point capacitive touch screen, AG anti-glare display technology
	Transmittance	> 80%
	Controller interface	USB
	Driver Support	Windows XP, Windows 7, Winows8, Windows 10, Linux
	Multi-touch	10 points (windows system)
	Surface Hardness	Mohs' Number 7H
Environmental	Work Temperature	-20 ~ 60° C (-4~140□)
	Storage Temperature	-30 ~ 80□ (-22 ~ 176□)
	Relative humidity	10~95% RH@40°C,non-condensing
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, Half-sine wave, 11ms duration
	EMC	CE/FCC Class A
	Water-proof	Front panel IP65

Dimensions:

Unit : mm

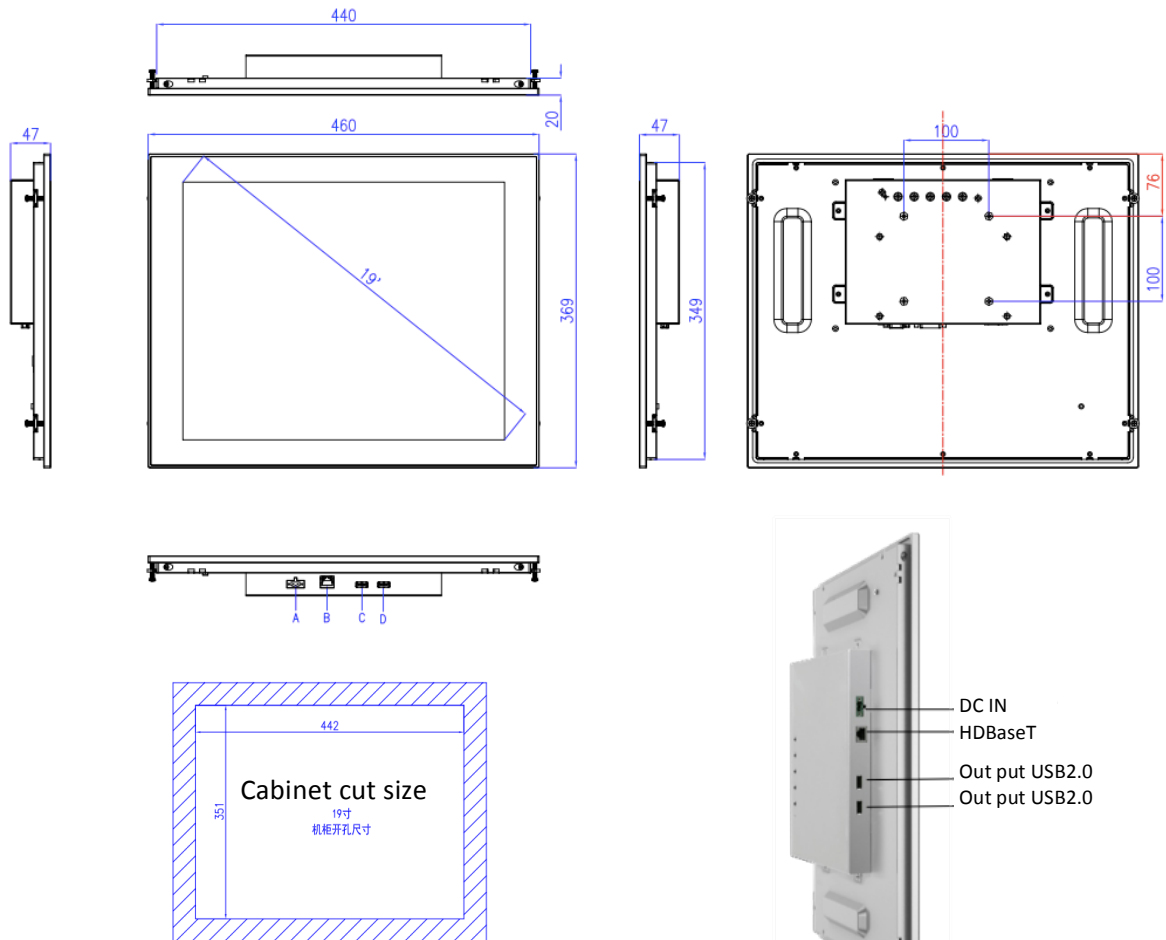

Ordering Information:

Product Code	Description
PANEL5000-C192-L-A	19" TFT LCD/Capacitive Touch Screen/1xHDBaseT/2x USB 2.0 /1280*1024/ eLINK-200 receiver/DC12-24V input

Packing List:

Hook	8*Hooks apply to Thickness=1mm~1.2mm
Terminal	2pin Phoenix terminal
DVI-D Cable	0.5M
USB Cable	0.5M
Remote sender	eLINK-200

Optional Equipment:

Adapter	12V/3.33A,40W 2pin Phoenix terminal
Power cable	EU/US/UK...
DVI-D cable	3M/5M
USB cable	3M/5M